



ERGONOMIC DESIGN
COMBINED WITH HIGH
LEVELS OF PROTECTION



PROGUARD

BURGLARY-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European EN 1143-1 standard, as certified by ECB•S for Grades II and III.
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means lower transportation costs and greater installation options.
- Innovations made with the Grade III models mean that a higher level of protection can be offered in a safe with reduced wall thickness and increased interior capacity.
- The three-way boltwork is constructed with solid steel bolts.
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts.
- Either a mechanical key lock or a high-security electronic lock can be used as the primary lock option. For Grade III models, at least one EN 1300 Grade B lock must be fitted as standard.
- Every model can be customised with a range of internal fittings to maximise storage capacity.
- ProGuard has a modern design with an ergonomic soft-touch handle.

PROGUARD

PRODUCT SPECIFICATIONS

Model	External height (mm) Gr II/III	External width (mm) Gr II/III	External depth (mm) Gr II/III	Internal height (mm) Gr II/III	Internal width (mm) Gr II/Gr III	Internal depth (mm) Gr II/III	Volume (litres) Gr II/III	Weight (kg) Gr II/III
60	530	500	521	430/440	400/410	360/359	62/65	234/209
110	690	600	561	590/600	500/510	386/396	114/121	334/315
150	875	600	561	775/785	500/510	386/396	150/159	402/377
200	1150	600	561	1050/1060	500/510	386/396	203/214	501/486
300	1600	600	561	1500/1510	500/510	386/396	290/305	744/655
350	1600	675	585	1500/1510	575/585	410/420	354/371	846/703
380	-/1295	-/785	-/620	-/1205	-/695	-/530	-/363	-/656
450	1850	675	616/615	1750/1760	575/585	440/450	443/463	981/813

External dimensions exclude handle and hinge projections.

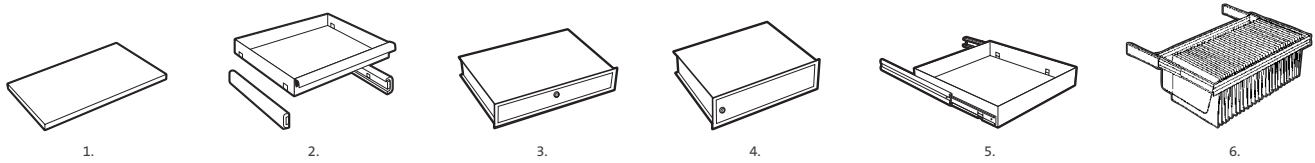

INTERNAL FITTINGS

1. Shelf
2. Extendable shelf
3. Lockable drawer
4. Lockable compartment
5. Extensible tray
6. Extensible file frame

LOCK OPTIONS

As the primary locking option, ProGuard safes can be fitted with either a high-security electronic lock or a key lock. For Grade III models, at least one EN 1300 Grade B lock must be fitted as standard. Dual locking is available from model 110. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard. ProGuard's high-security electronic lock – certified Class B by ECB•S – includes the following features:

- 1 master code, 1 supervisor code and 7 user codes.
- Time delay of up to 99 minutes between the lock being operated and the door being opened. Also equipped with time-delay override.
- Protective function to raise a silent alarm if the lock is opened under duress.

BURGLARY TESTING



ProGuard has been approved by ECB•S in accordance with the European EN 1143-1 standard for burglary protection in Grades II and III.

A range of attack tools were used to test ProGuard's level of resistance, from basic tools to sophisticated thermal and electrical equipment.

IMPROVED CAPACITY

Thanks to innovations in Grade III models, the thicknesses of safe walls can be reduced. This means that a safe with a higher level of protection can also offer greater capacity for storing valuable items and sensitive documents.

Authorised dealer

www.chubbsafes.com